Service Bulletin

	· .		
Issue No	VZR1800-24		
Date	22/06/2010		
Page	1 of 1		


Subject	THROTTLE CABLE 'O-RING INSTALLATION
Applicable Model	VZR1800K6-K7
Effective Engine or Frame No	
Reference	SERVICE MANUAL:99500-39293-01E SET-UP MANUAL:99505-01096-01E


This bulletin is to inform you of the proper installation of the O-ring used to located and secure the throttle cables on the VZR1800K6-K7 models. Information received from the market has found that the O-ring may not have been installed at the time of new vehicle set-up, or was removed by service during routine maintenance or repairs.

Correct installation of the O-ring and the throttle cables correctly routed through the cable guide ensures smooth operation of the throttle cables when the handlebars are turned to the full lock position.

When setting up a new vehicle, make sure to correctly install the O-ring packed in the carton box located in the crate, by following the procedure outlined in the appropriate Assembly and Pre-Delivery Service Guide. 99505-01096-01E

When performing routine maintenance or repairs on a customer's VZR1800K6-K7 check the installation of O-ring and inspect the throttles cables for correct routing. Correct any discrepancies found before returning the unit to the customer. Additionally verify that the O-ring is properly installed on the new and used VZR1800K6-K7 models in your inventory prior to customer delivery.

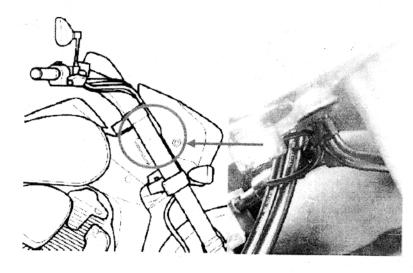



Throttle cables

O-ring

Clamp L.: 90mm.

Headlight stay



SUZUKI AUSTRALIA PTY. LIMITED A.C.N. 001 828 164

Dealer Servi	ce I						
Principal Mana	ger	Parts Dept	Sales Manager	Service Administration	Workshop Technician	Workshop Technician	Workshop Technician
				The same of the second of the second of the second	A CONTRACTOR OF THE PARTY OF TH		